

Reservoir Accessories

Suction Strainers

Specifications

Materials:

Media: Stainless steel

Tube and endcap: Zintec



Head: glass filled nylon

Filtration Element: 100 mesh (149 micron)

Operating Temperatures: 195°F (90°C) maximum

Bypass: None, 3 psi (0.2 bar)

Weight: See chart below

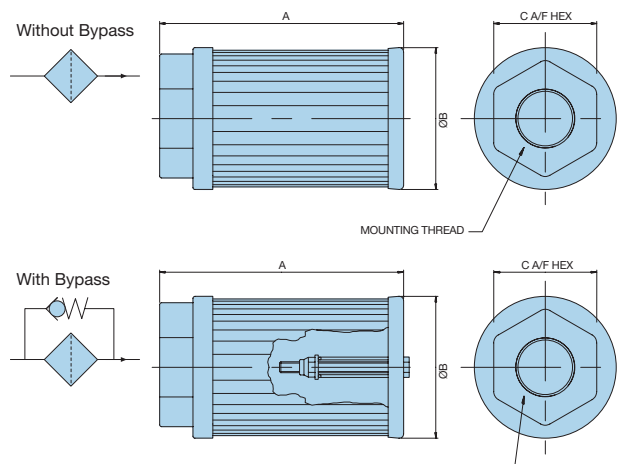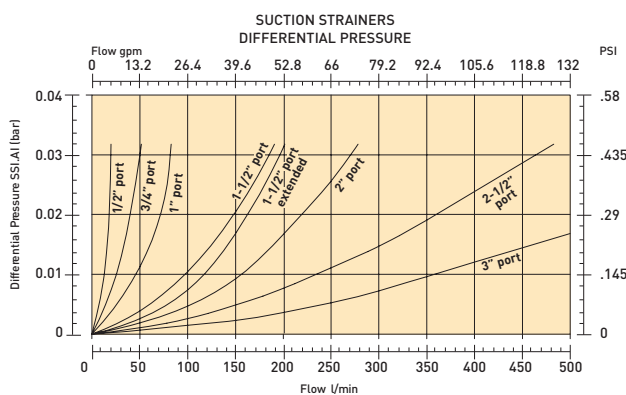

Part Number With Bypass	Bypass	Port (NPT)	Nominal Flow GPM (LPM)	Length "A" Inch (mm)	Diameter "B" Inch (mm)	BSPP Fitting
937480	No	1/2"	5 (19)	4.125 (104.8)	1.90 (48.3)	No
937481	Yes	1/2"	5 (19)	4.125 (104.8)	1.90 (48.3)	No
937482	No	3/4"	8 (30)	3.55 (90.2)	2.67 (67.8)	No
937483	Yes	3/4"	8 (30)	3.55 (90.2)	2.67 (67.8)	No
937484	No	1"	10 (38)	5.25 (133.4)	2.67 (67.8)	No
937485	Yes	1"	10 (38)	5.25 (133.4)	2.67 (67.8)	No
937488	No	1-1/2"	30 (114)	8.01 (203.5)	3.47 (88.4)	No
937489	Yes	1-1/2"	30 (114)	8.01 (203.5)	3.47 (88.4)	No
937490	No	1-1/2"	50 (189)	9.85 (250.2)	4.00 (101.6)	No
937491	Yes	1-1/2"	50 (189)	9.85 (250.2)	4.00 (101.6)	No
937492	No	2"	50 (189)	9.85 (250.2)	4.00 (101.6)	No
937493	Yes	2"	50 (189)	9.85 (250.2)	4.00 (101.6)	No
937494	No	2-1/2"	75 (284)	10.10 (256.5)	5.17 (131.3)	No
937495	Yes	2-1/2"	75 (284)	10.10 (256.5)	5.17 (131.3)	No
937496	No	3"	100 (378)	11.50 (292.1)	5.17 (131.3)	No
937497	Yes	3"	100 (378)	11.50 (292.1)	5.17 (131.3)	No